

# SOFIA PROFESSIONAL

INDUCTION FREESTANDING RANGE 30"



CODE ID



**FSRC 3004 P MI ED 2F X**



- Easy Clean Ceramic Glass
- Booster
- Pan Detection System
- Residual Heat Sensor

- Soft Closing
- Self Clean Oven
- Multi-Level Cooking
- 1 Telescopic Rack
- Cool Touch Door
- Digital Controls
- Meat Probe
- Fast Pre-Heat

## PROFESSIONAL COOKER 30"

Professional Digit Control

### INDUCTION HOB

4 induction cooking zones  
Glass ceramic surface  
Pan detection  
Booster on all cooking zones  
ON / OFF and residual heat indicators (H)  
Heating and low temperature functions

## OVEN

Electronic multifunction  
Digital timer and knobs  
Double internal ventilation  
Self-cleaning with PYROLYSIS  
Door with assisted closing  
Interior with black porcelain enamel  
1 telescopic rack with total extraction  
2 flat metal grids  
1 enamelled tray with anti-splash  
Internal lighting with 3 light points  
Internal capacity 124 liters

### OPTIONAL ACCESSORIES

INDUKIT 4:  
Kit of 4 inductor discs for cooking with  
non-specific pans for induction




STAINLESS STEEL  
FSRC 3004 P MI ED 2F X



MATTE BLACK STEEL  
FSRC 3004 P MI ED 2F MBK

# SOFIA

INDUCTION FREESTANDING RANGE

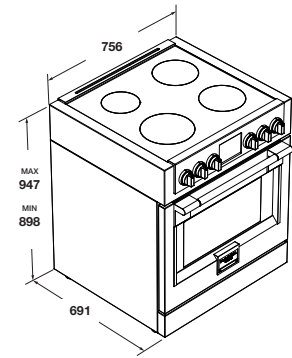

FSRC 3004 P MI ED 2F ...	
Type	Free standing range 30"
Finishing	... X Stainless steel / ... MBK Matte Black
Inner sleeve	Ultra Black Piro
<b>COOKING HOB</b>	
Supply	Induction
Surface	CeraBlack
Pan detector / Safety lock	• / •
Cooling with fans	•
Power Levels	1 - 9
45 ° C melting function	•
Slow cooking at 70 ° C	•
Booster for each zone	•
Residual heat detector H	•
Error code indicator	•
<b>INDUCTION COOKTOP FEATURES</b>	
Left front power (min - Max) (W)	Ø 230 mm 2300 - 3700 W
Rear left power (min - Max) (W)	Ø 165 mm 1400 - 2200 W
Right front power (min - Max) (W)	Ø 200 mm 1850 - 3000 W
Rear right power (min - Max) (W)	Ø 200 mm 1850 - 3000 W
<b>OVEN</b>	
Typology	Electronic multifunction
Double internal ventilation	•
Energy efficiency class	A
Capacity (liters)	124 L
Forced cooling	•
Functions n.	11
<b>PERFORMANCE</b>	
Maximum cooking temperature	290° C
Pyrolysis temperature	460° C
Thermo-ventilated	•
Self-cleaning	•
<b>COMMANDS</b>	
Control system	Digital display with knobs
Automatic shutdown	•
Booster / Meat probe	• / •
<b>SAFETY</b>	
Cold door / Glass n. / Soft closing	• / 4 / •
<b>ACCESSORIES</b>	
Lighting (Halogen 20 W) n.	3
Flat grids / Telescopic n.	2 / 1
Trays n. / Type	1 / enamelled drip pan
<b>POWER RATING</b>	
Max electrical power (W)	3700 W
Voltage / Frequency (V - Hz)	230 - 50
Cord / Plug	• / Schuko
<b>DIMENSIONS</b>	
Width mm	756
Height ( min - Max ) mm	898 - 947
Depth ( mm )	691